


LED STREET LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Chip Type	LED Brand	Beam	Dimensions (mm)
DLST40-330-SG//40	40w	SMD	EPISTAR	140°*70°	L:330 x W:150 x H:65
DLST60-375-SG//40	60w	SMD	EPISTAR	140°*70°	L:375 x W:150 x H:65
DLST100-525-SG//40	100w	SMD	EPISTAR	140°*70°	L:525 x W:180 x H:75
DLST150-650-SG//40	150w	SMD	EPISTAR	140°*70°	L:650 x W:260 x H:95
DLST200-700-SG//40	200w	SMD	EPISTAR	140°*70°	L:700 x W:260 x H:95
DLST100-630-CG//60	100w	COB	EPISTAR	120°	L:630 x W:315 x H:90
DLST150-740-CG//60	150w	COB	EPISTAR	120°	L:740 x W:315 x H:90
DLST100-650-CG//60	100w	COB	EPISTAR	120°	L:650 x W:250 x H:90
DLST150-800-CG//60	150w	COB	EPISTAR	120°	L:800 x W:310 x H:130

Available in a variety of sizes

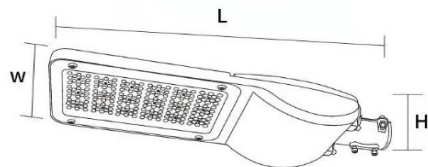

100W COB



150W COB



LED STREET LIGHT OUTDOOR



APPLICATIONS::

Suitable for lighting at streets, high ways, bridges, ports, parking lots etc.

TECHNICAL DATA SHEET

Power (Rated)	::	40w-200w
LED Chip	::	EPISTAR
Body	::	Alluminum die cast (Silver Grey-Powder Coated)
Driver	::	1 Constant current DECENT® / MEAN WELL brand driver
Operating Voltage	::	100V-300V
Frequency (Hz)	::	50/60Hz
Power Factor	::	≥0.95
Colour Temperature	::	6500K (DAY) / 4000K (COOL) / 3000K (WARM)
Lumen	::	100-110lm/w
Beam Angle	::	140°*70° (SMD) / 120° (COB)
Life Time	::	50,000 hrs.
Operating Temperatur	::	25 °C to 55 °C
Index of Protection	::	IP66
Certifications	::	CE, RoSH, TuV
Country of Origin	::	CHINA

