


LED FACADE LIGHT :: AREA LIGHT OUTDOOR - high power

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Brand	Beam Angle	Protection	Dimensions (mm)
DLF18-125-10G/30	18w	BRIDGELUX (USA)	10°	IP66	L:125 x W:125 x H:70
DLF50-154-10G/30	50w	BRIDGELUX (USA)	10°	IP66	L:154 x W:154 x H:100
DLF400-543-10B/30	400w	OSRAM	10°	IP66	L:543 x W:100 x H:000
DLF400-543-30B/30	400w	CREE (USA)	30°	IP66	L:530 x W:300 x H:180
DLF1000-470-SB/60	800/1000w	CREE (USA)	10°/30°/60°	IP66	L:470 x W:543 x H:250

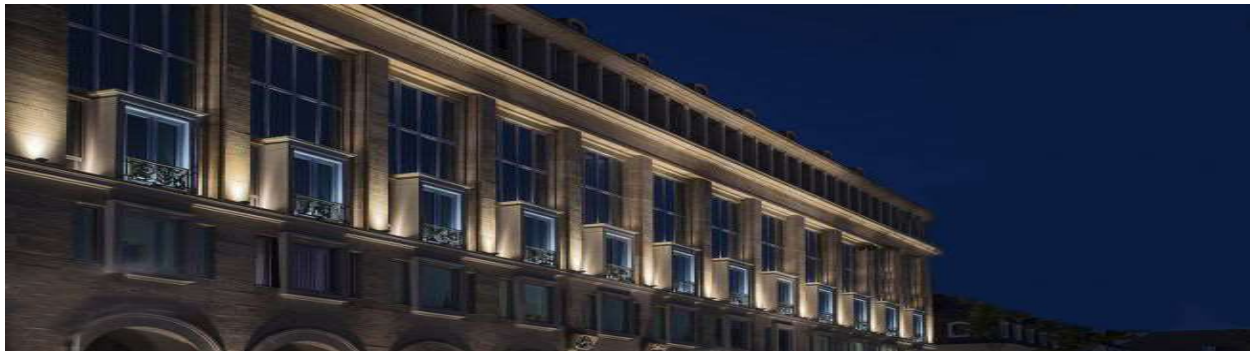

18w



50w



400w



400w



2x400/500w

- Voltage** :: 85V-265V
- Protection** :: IP65/IP66
- CCT (K)** :: 6000 K
- Lumen** :: 110lm/w
- CRI** :: ra>80
- PF** :: >0.95
- Frame** :: Rectangular
- Appearance** :: Black/Grey



APPLICATIONS::

Construction Area, Playing Ground, Mines, Industries, Façade Lighting etc.