

ensuring safety and comfort...



LED LINEAR LIGHT - T1

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
DLL40-1140-PRW/60	DLL40-1140-PRW/40	DLL40-1140-PRW/30	40w	White	L:1140 x W:60 x H:80
DLL40-1140-PRB/60	DLL40-1140-PRB/40	DLL40-1140-PRB/30	40w	Black	L:1140 x W:60 x H:80





- Eye friendly
- Anti-glare
- Shadowless
- Uniformity
- Linkable
- Elegant Look

APPLICATIONS::

offices, hotels, display centre, public areas etc.

Aluminium body-screwless design-Germany diffuser

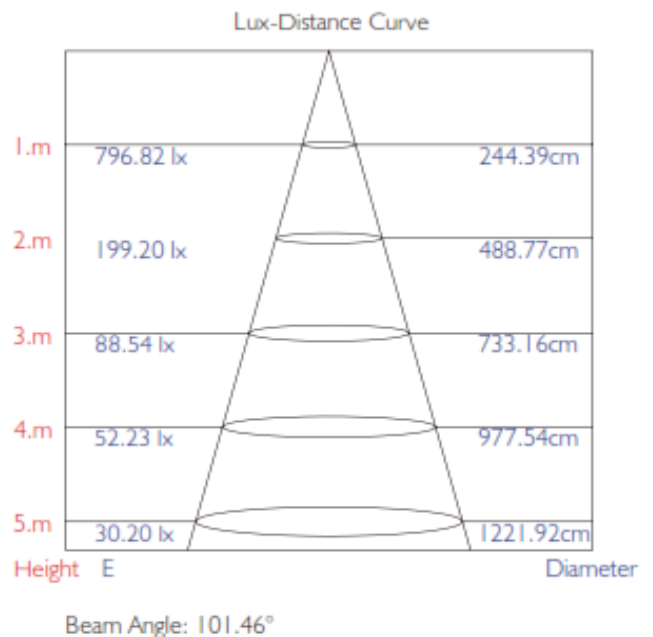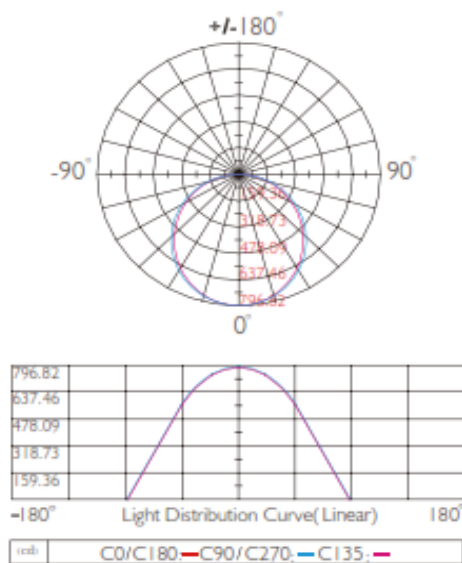

Voltage 180-265V at 50/60Hz
 mA 1000mA
 PF >0.9
 Lifetime 30,000hrs

Beam Angle 100°
 CRI ra>80
 Available CCT 6000K/4000K/3000K
 Lumen 3000lm



ensuring safety and comfort...



LED LINEAR LIGHT - T1

